
45-40 Pneumatische Horizontale Krimpmatrijs voor OTP-terminals

Model No. JW-AP15

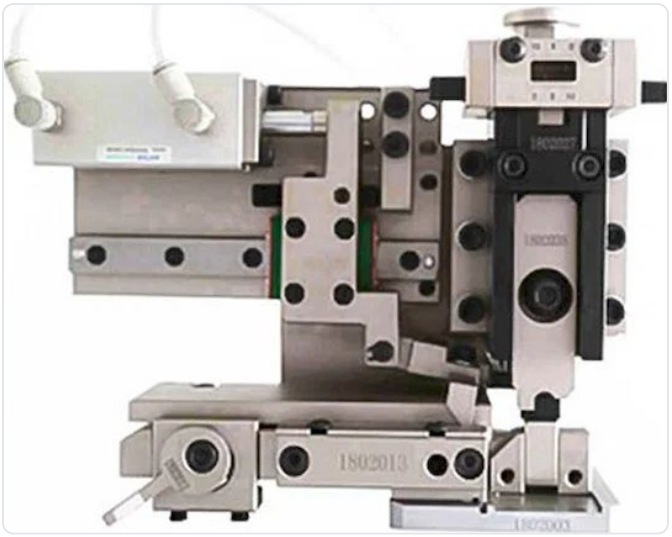

SPECIFICATIONS

Model	45-40
Type	Pneumatische horizontale krimpmatrijs
Toepassing	OTP-terminals
Uitvoering	U-vormige mal
Compatibiliteit	Horizontale en verticale krimpmallen

45-40 pneumatische horizontale matrijs, Terminal krimpmatrijs, Terminal krimpende matrijs, Terminal krimpapplicator, OTP U-vormige mal, Terminal Machine Applicator, OTP-vorm, Otp Terminal Mould, terminal applicator matrijs OTP-mal Horizontale en verticale krimpmallen, terminale applicator, matrijs, OTP-mal, horizontale en verticale krimpmallen

OTP high precision horizontal mold



Feeding method: horizontal feed
Feeding stroke: 30mm
Slider stroke: 30mm
Scope of application:
It is suitable for high-precision terminal and connection wire manufacturers with very high requirements for crimping. The ingredients are QPQ and heat-treated fine embroidery technology, which can make the product size more accurate, and it is common with JAM, Xinming and terminal machines.



4S-40 pneumatic horizontal die

Feeding stroke: 40mm
Slider stroke: 40mm
Scope of application: suitable for European and American series automatic and semi-automatic crimping equipment, C.H/I.H adjustment accuracy is 0.02mm, suitable for various horizontal terminals

4E-40 pneumatic straight mold



Feeding stroke: 40mm
Slider stroke: 40mm
Scope of application: suitable for European and American series automatic and semi-automatic crimping equipment, C.H/I.H adjustment accuracy is 0.02mm, suitable for various straight terminals